





FIG. 9

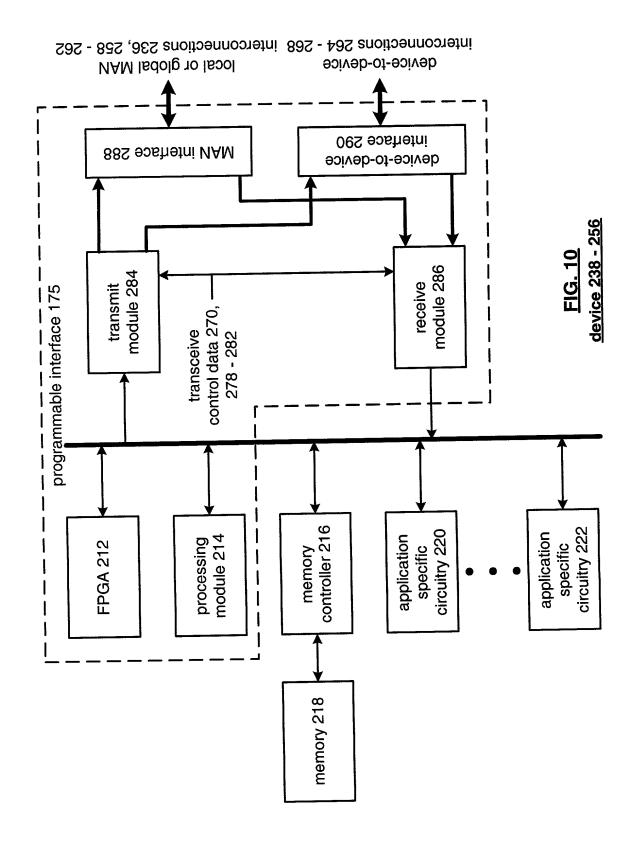

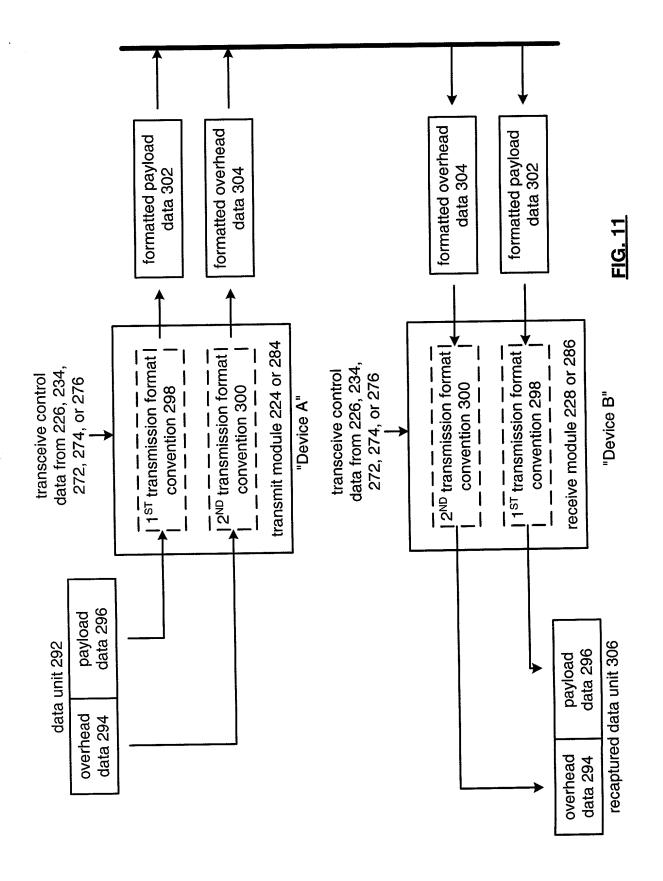

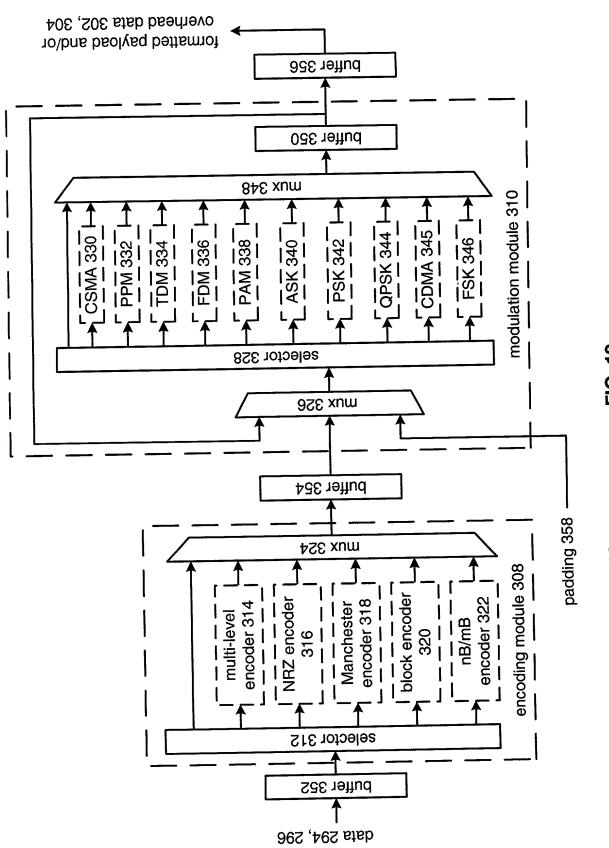

overhead and/or payload

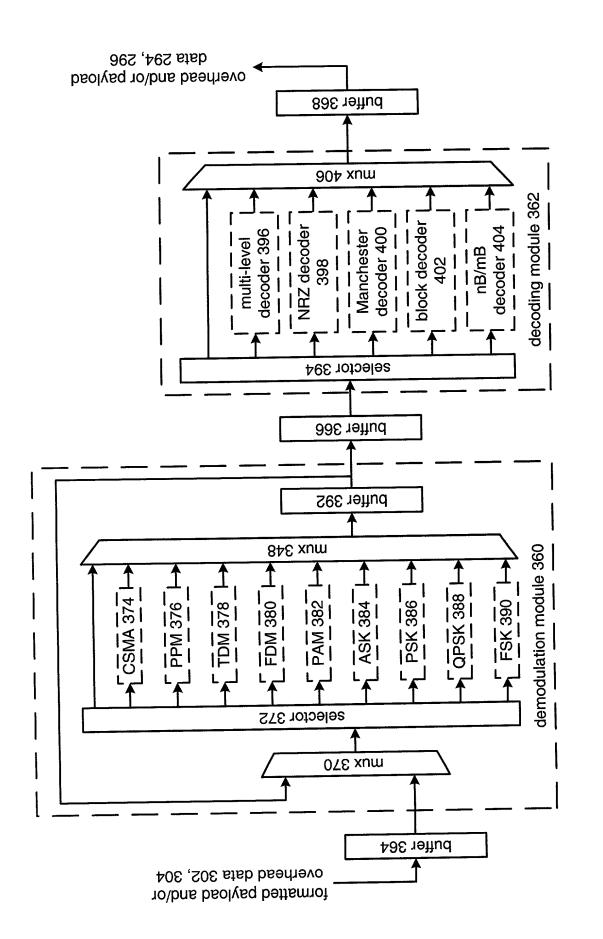


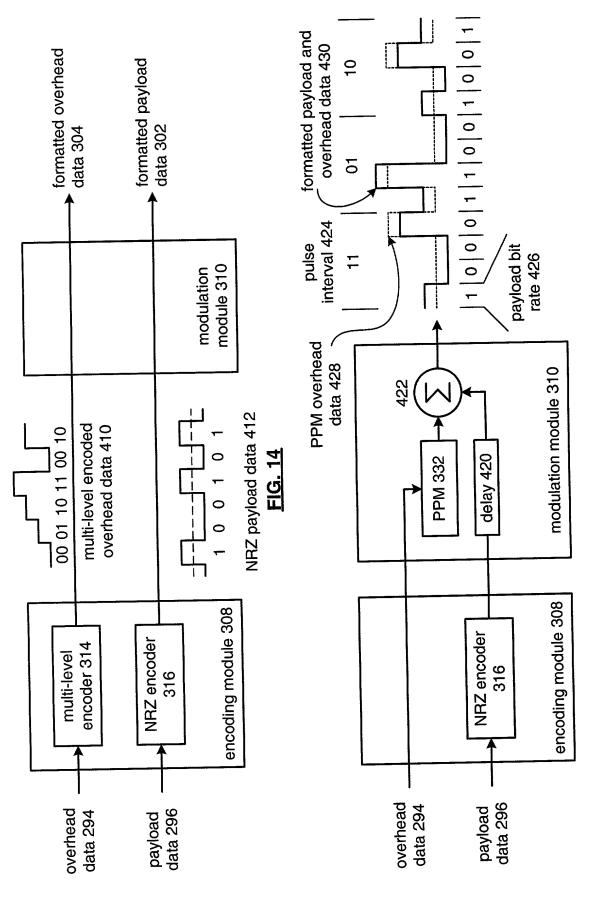


FIG. 15

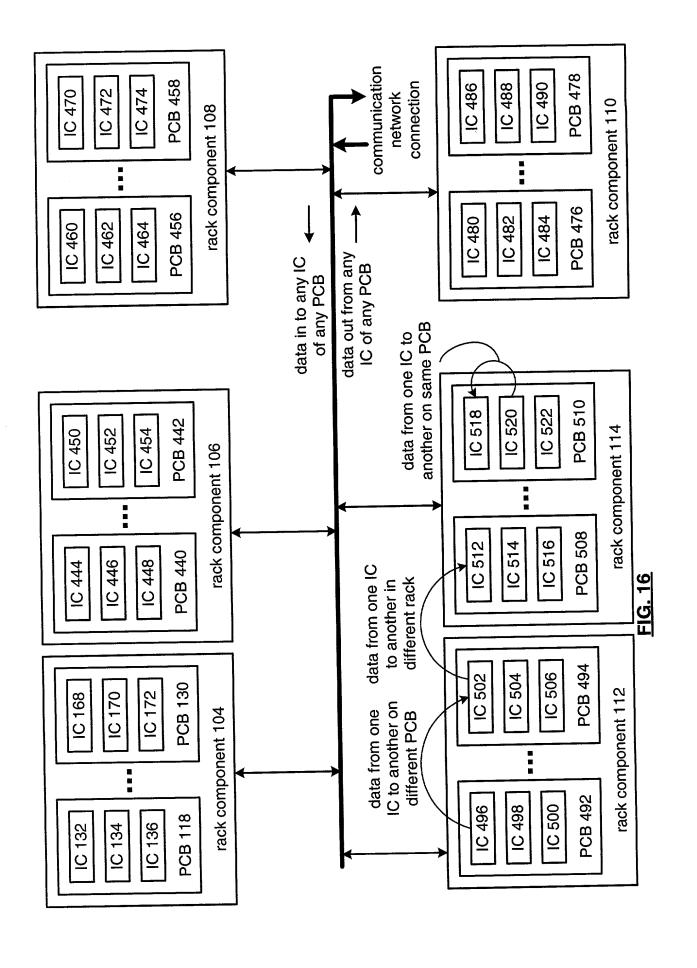


_	1											Ì
	524	scheme	Α	В	၁	a	۵	Ш	Ш	Ш	u = 3	
	transmission assignments 524	destination	134-118-104	136-118-104	x-130-104	x-x-106	x-x-108	x-x-110	x-x-112	x-x-114		
	transmissic	source	132-118-104	132-118-104	132-118-104	132-118-104	132-118-104	132-118-104	132-118-104	132-118-104		

—т						
scheme-resource assignment 526	encode/mod/S-P	1-0-S	1-0-P	2-1-8	 2-0-S	18
e-resource	resources	1 path	2 paths	1-0H, 1- PL	 1 path	FIG. 18
scheme	scheme	A	4	⋖	 В	

/
_
Ġ
\overline{a}
ш,

·····			
	Serial/Parallel	S-Tx of OH and PL P-Tx of OH and PL OH:path1; PL:path2 S-Tx of OH and PL	
528	payload mod	none none mix	•••
-serial/parallel table	OH modulation	none none none PPM	•••
encoding-modulation-serial/parallel table 528	payload encoding	NRZ NRZ nB/mB NRZ	•••
9	OH encoding	multi-level multi-level multi-level none	•••
	encode/mod/S-P	1-0-S 1-0-P 2-1-S 0-1-S	

FIG. 19

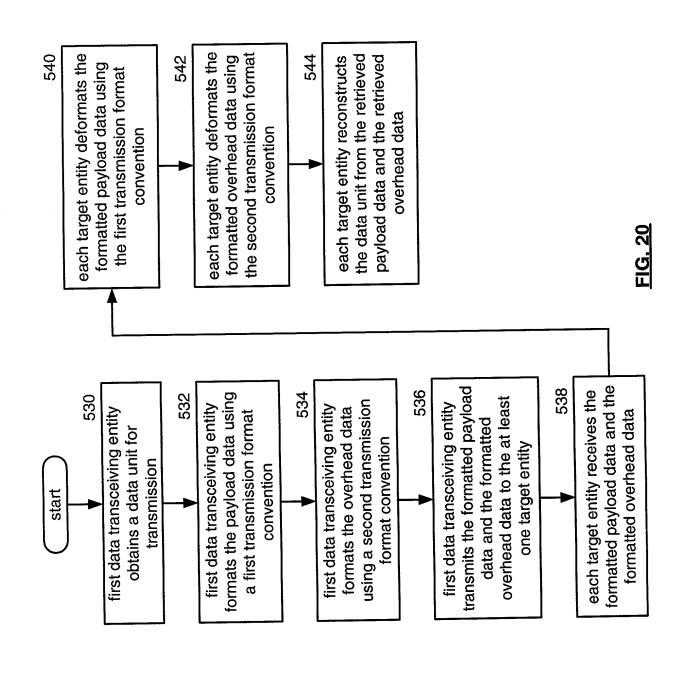

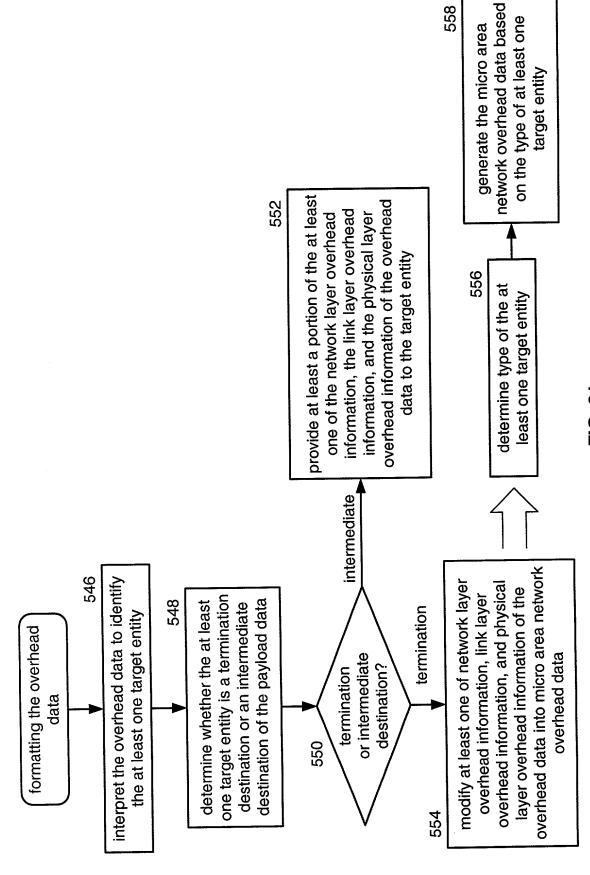
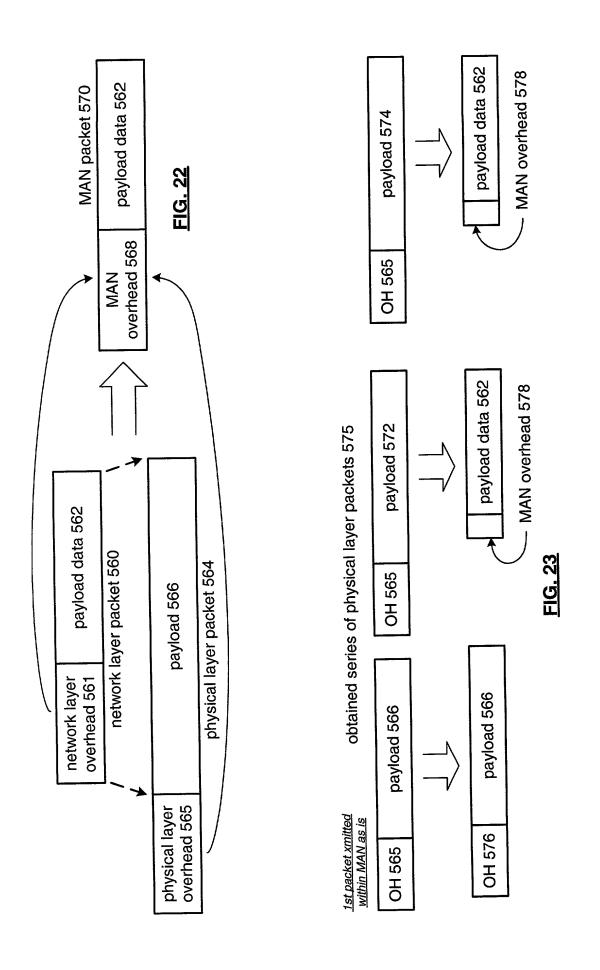


FIG. 21



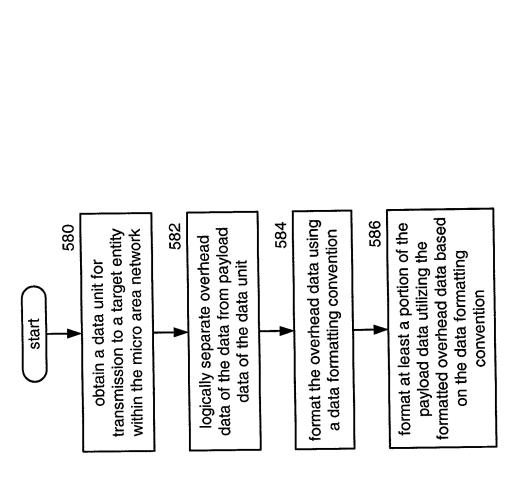


FIG. 24

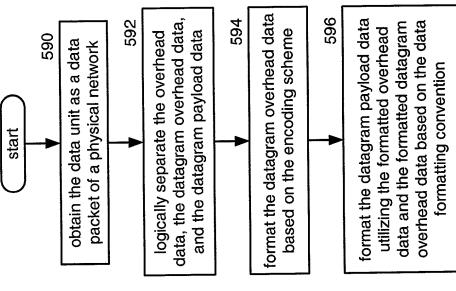


FIG. 25

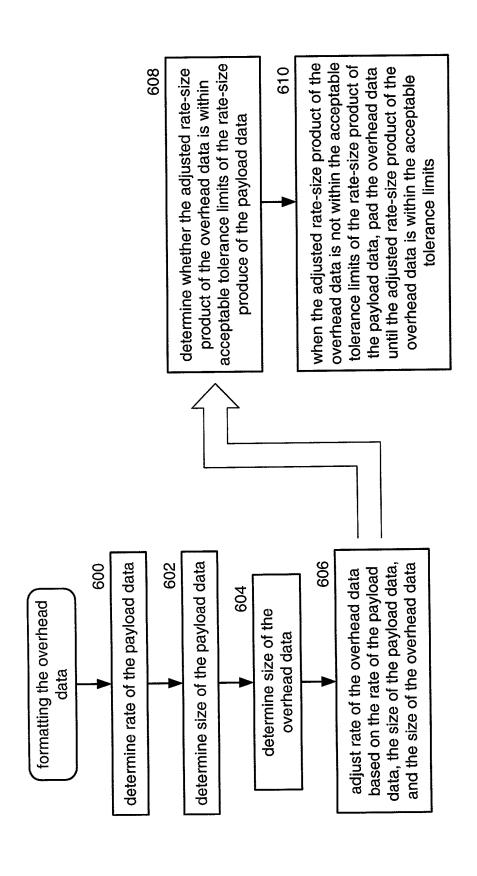
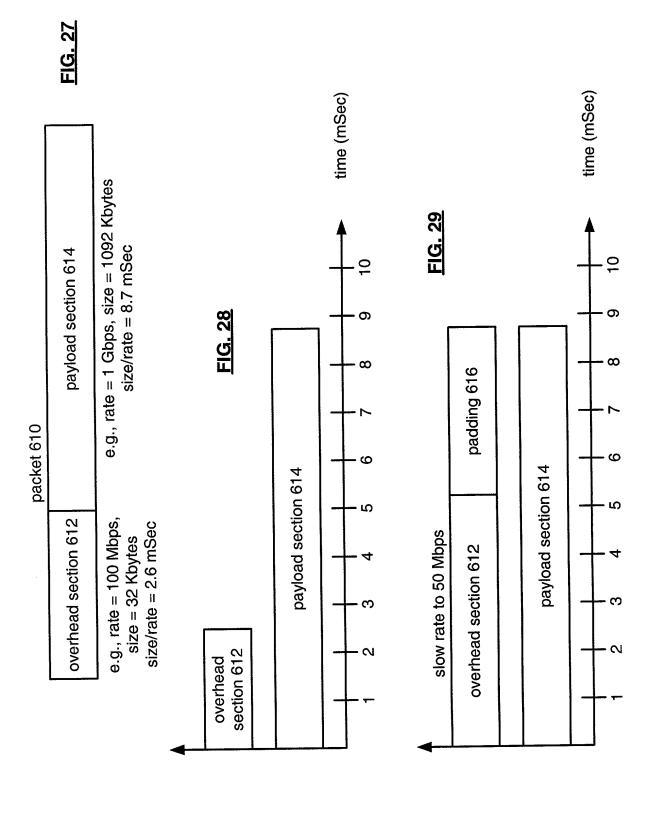


FIG. 20



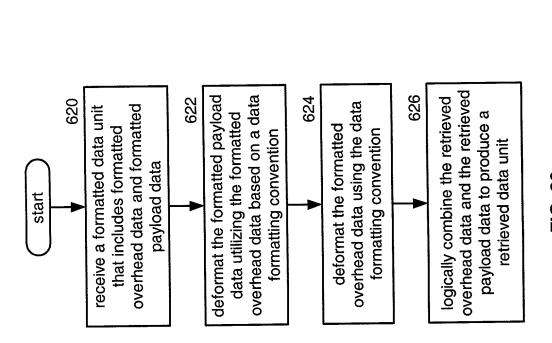


FIG. 30


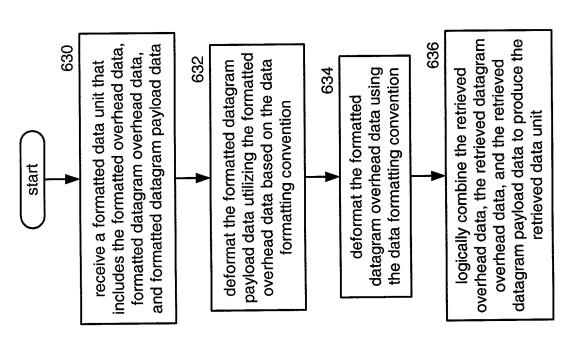


FIG. 31

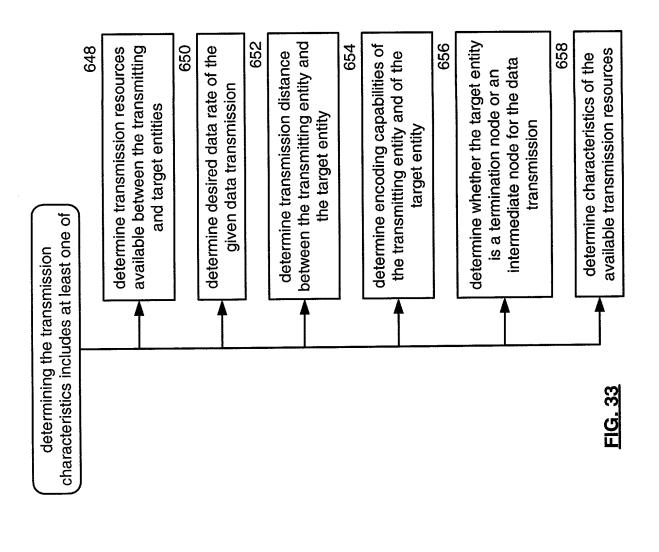

transmitting entity and the target 646 642 644 640 entity of the plurality of entities convention to the target entity determine identity of a target transmission characteristics characteristics between the determine a transmission provide the transmission convention based on the determine transmission entity start

FIG. 32

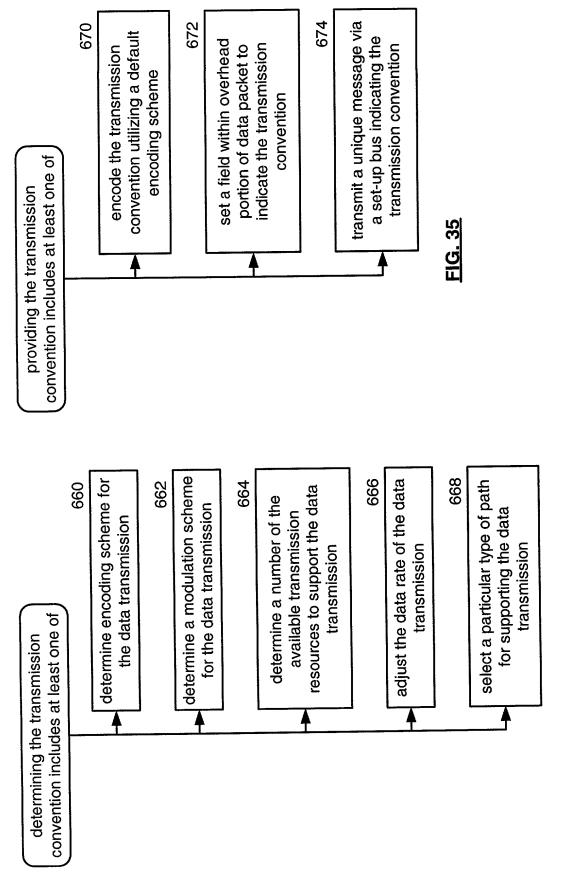


FIG. 34

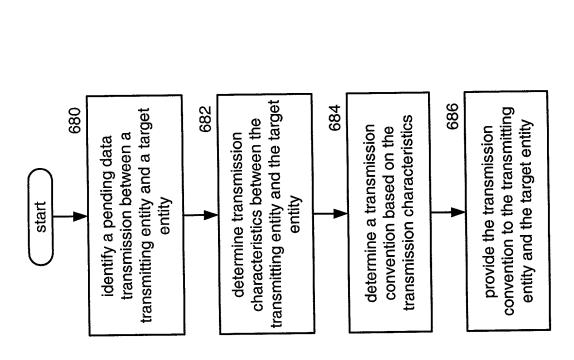
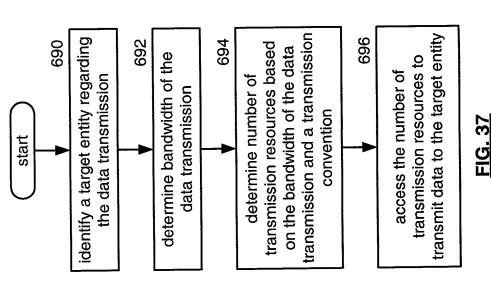


FIG. 36



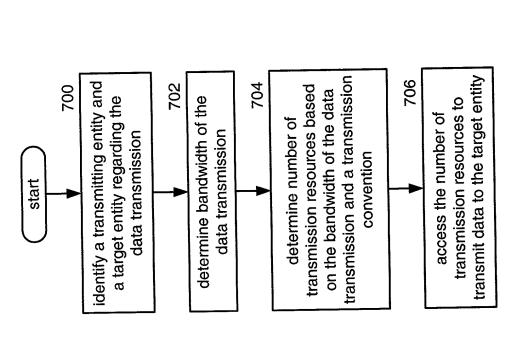


FIG. 38

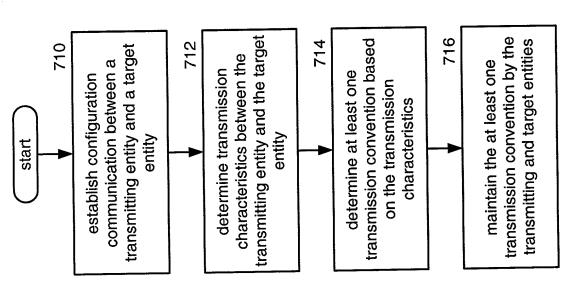


FIG. 39

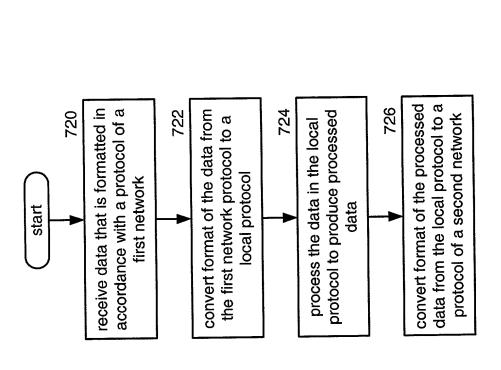


FIG. 40

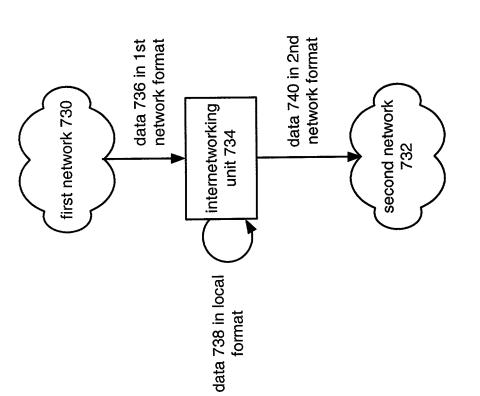


FIG. 41